


# Micronik: Z-3i MkII

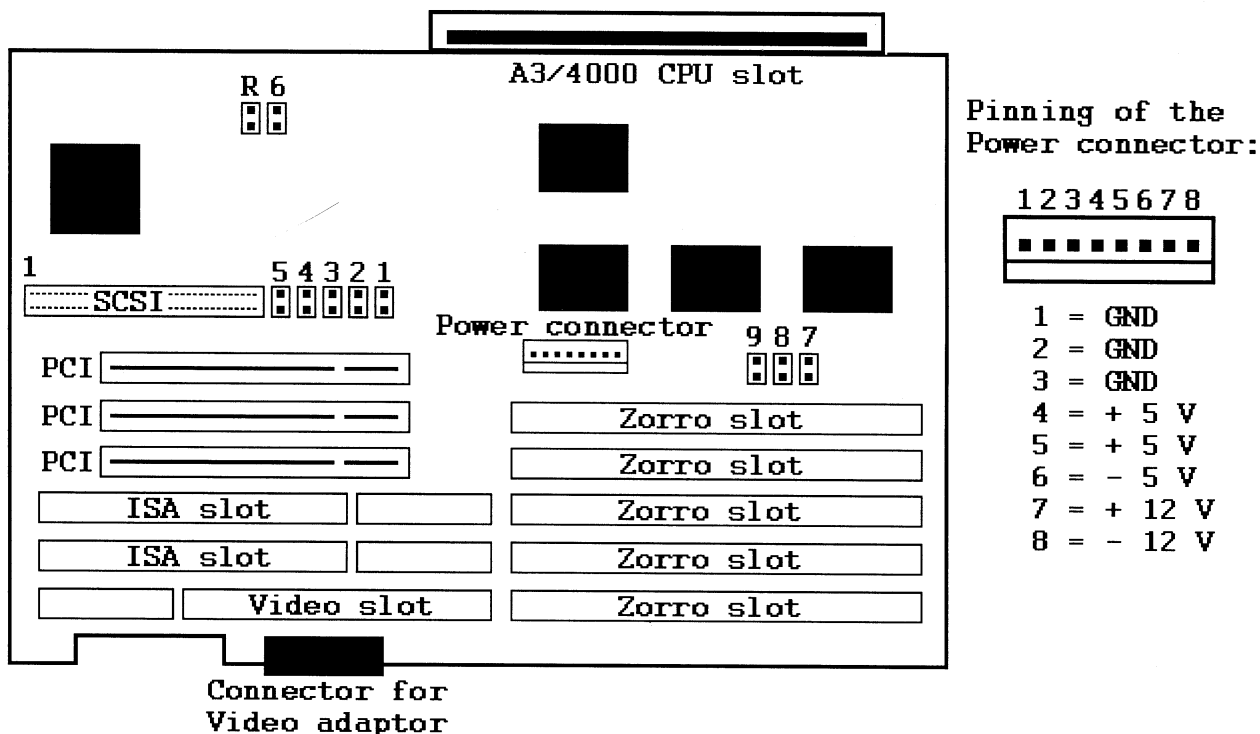

**Jumper SCSI**

- 5 - SCSI on/off (closed=off)
- 4 - not used
- 3 -
- 2 - > SCSI ID Hostadapter
- 1 -

**Jumper Accelerator card**

- |       |     |  |
|-------|-----|--|
| 7 8 9 | 6 R |  |
| ■ ■ ■ | ■ ■ | internal A1200 CPU                             |
| ■ ■ ■ | ■ ■ | A1200 accelerator<br>Blizzard 1230/40/60/PPC   |
| ■ ■ ■ | ■ ■ | A3/4000 accelerator<br>Cyberstorm MK II        |
| ■ ■ ■ | ■ ■ | A3/4000 accelerator<br>Cyberstorm MK III / PPC |

This busboard is designed for use with the Micronik Infnitiv Towers (Mk II).

- Zorro II Slots: None
- Zorro III Slots: 5 (None DMA)
- ISA Slots: 2 (non active)
- PCI Slots: 2 (non active)
- Video Slots: 1 (Optional with adaptor)
- Other Bus Slots: Amiga 3000/4000 CPU slot and SCSI host

This busboard requires Kickstart 3.1. If an A1200 accelerator is used then the Zorro slots can be used in Zorro II mode only, they require an A3000/4000 accelerator to use the Zorro slots in Zorro III mode.

Options

Optional Video Slot adaptor


Download the Manual  
[Manual](#)

NB. (Unconfirmed) This board might be incompatible with the Toccata Sound Card and Piccolo SD64.  
 Incompatible with Apollo 1200 Cards  
 Compatible with spirit oktabyte.

Compatible with original Piccolo  
Compatible with Picasso IV  
Compatible with GVP IO Extender

Some information from Microniks Website.

## Micronik: Z-3i

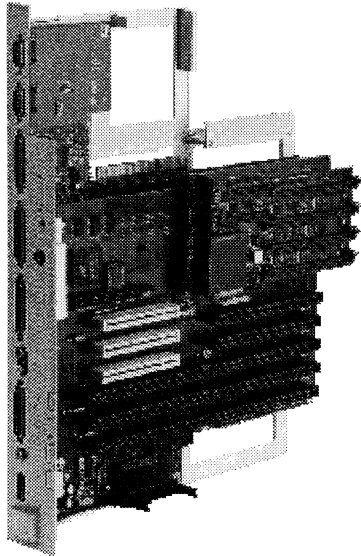

This busboard is designed for use with the Micronik Infnitiv Towers (Mk I). Please also note that the number of slots may vary depending on the exact revision. This description is based on version 6.8 of the board

Zorro II Slots: None

Zorro III Slots: 5 (which can be jumpered to Zorro II if needed)

ISA Slots: 2 (non active)

PCI Slots: 2 (non active)

Video Slots: 1 (Optional with adaptor)

Other Bus Slots: Amiga 3000/4000 CPU slot and SCSI host

This busboard requires Kickstart 3.1. If an A1200 accelerator is used then the Zorro slots can be used in Zorro II mode only, they require an A3000/4000 accelerator to use the Zorro slots in Zorro III mode.

### Options

Optional Video Slot adaptor

NB. (Unconfirmed) This board might be incompatible with the Toccata Sound Card and Piccolo SD64.

Incompatible with Apollo 1200 Cards

Compatible with spirit oktabyte.

Compatible with original Piccolo

Compatible with Picasso IV

Compatible with GVP IO Extende

Compatible with the Toccata Sound Card

Compatible with the V-Lab Motion

Compatible with CS-PPC

Pictures from Micronik